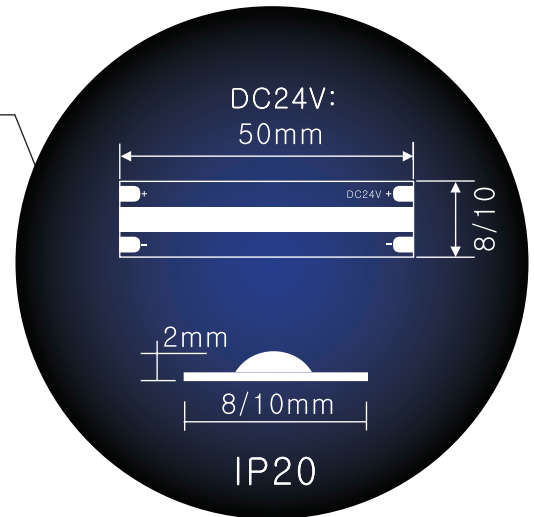
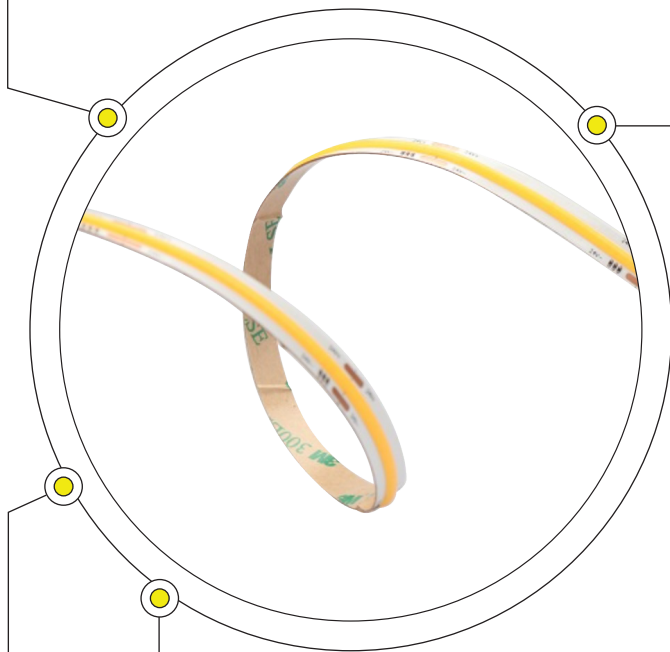


+ IP
20

LOA

✓
5 YRS

Idt

FLX



PHYSICAL DATA

FEATURES

- Light beam angle up to 180°
- Self encapsulated design
- Chips on broad strip
- High quality PCB, high thermal 3M adhesive
- No dots shown through diffusers

MOUNTING

Surface

APPLICATION AREAS

Commercial, Offices, Industrial, Retail, Hotels, Schools, Restaurants, Museums, Galleries, Residential, Architectural, Supermarkets, Joinery Applications

OPTIONS & ACCESSORIES

- Offers optional 2700-6000K

TECHNICAL DATA

LBLFLEX10WW24V

LBLFLEX10CW24V


LAMP	COB LED	COB LED
OPERATING VOLTAGE-VAC	24V	24V
TOTAL POWER (W)	10W	10W
SYSTEM OUTPUT (LM)	880LM	989LM
EFFICACY (LM/W)	88	99
CCT (K)	3000K	4000K
CRI (Ra)	>80	>80
BEAM ANGLE	180°	180°
RATED LIFE (HRS)	50 000 HRS	50 000 HRS
CURRENT (MA)	0.42MA	0.42MA
OPERATING TEMPERATURE °C	-20°C TO 50°C	-20°C TO 50°C
TC CASE MAX TEMP (°C)	60°C	60°C
MAC ADAM STEP	3 STEP	3 STEP
DIMENSIONS	5000mm x 10mm x 2mm	5000mm x 10mm x 2mm
WEIGHT	0,25	0,25
CUT	50mm/cut	50mm/cut



cd/klm

C0 - C180

C90 - C270



E&OE MAY OCCUR



Lights By Linea
Since (1990)

Cape Town | 48 Marine Dr, Paarden Eiland | T: +27 21 511 6116
info@lightsbylinea.com | www.lightsbylinea.com