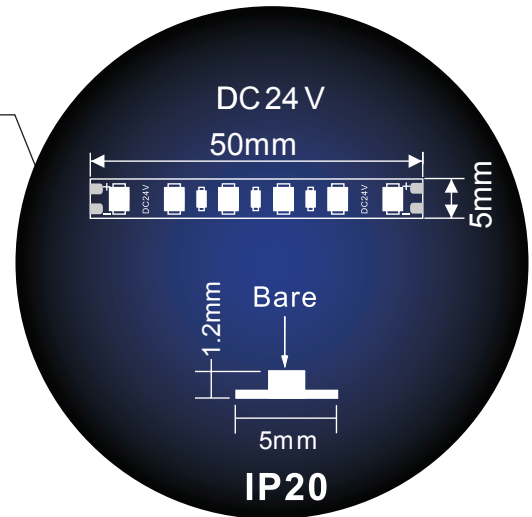
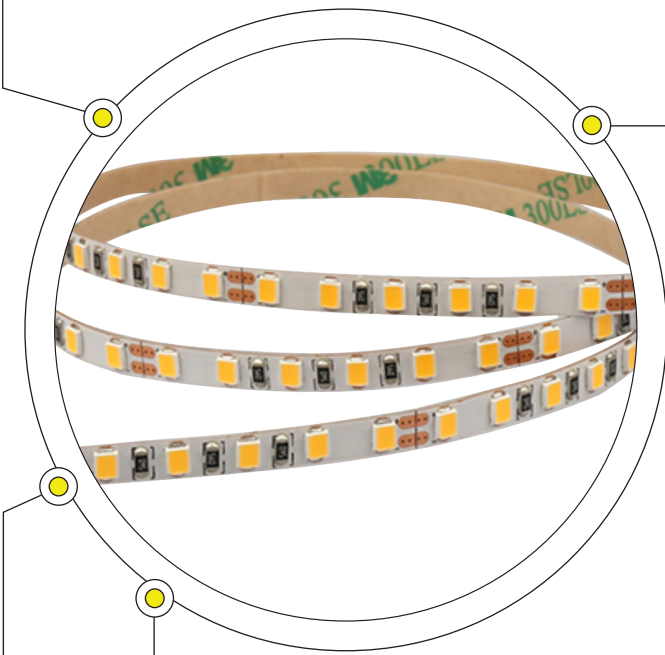


+ IP
20

LOA

✓
5 YRS

ldt

FLX



PHYSICAL DATA

FEATURES

- Self-encapsulated design
- High quality PCB, high thermal 3M adhesive
- 1-BIN delivery / 5m Reel
- Dimmable
- Very narrow for minimalistic design
- Special strip for A18 profile

OPTIONS & ACCESSORIES

- Offers optional 2100 - 6000K

- White lights and R/G/B/Y and others colorful lights for option

MOUNTING

Surface

APPLICATION AREAS


Commercial, Offices, Industrial, Retail, Hotels, Schools, Restaurants, Museums, Galleries, Residential, Architectural, Supermarkets, Joinery Applications

TECHNICAL DATA

LBLFLEX100WW

LBLFLEX100CW


LAMP	SMD2835	SMD2835
OPERATING VOLTAGE-VAC	24V	24V
TOTAL POWER (W)	6.7W	6.7W
SYSTEM OUTPUT (LM)	594LM	594LM
EFFICACY (LM/W)	88	88
CCT (K)	3000K	4000K
CRI (Ra)	>80	>80
BEAM ANGLE	120°	120°
RATED LIFE (HRS)	50 000	50 000
CURRENT (MA)	0.56MA	0.56MA
OPERATING TEMPERATURE °C	-20°C TO 50°C	-20°C TO 50°C
TC CASE MAX TEMP (°C)	60°C	60°C
MAC ADAM STEP	3 STEP	3 STEP
DIMENSIONS	5000mm x 5mm x 1.2mm	5000mm x 5mm x 1.2mm
WEIGHT	0,25	0,25
CUT	50mm/cut	50mm/cut

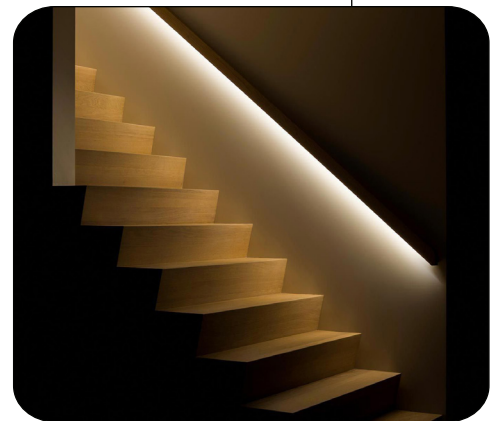

cd/klm

C0 - C180

C90 - C270



E&OE MAY OCCUR



Lights By Linea
Since (1990)

Cape Town | 48 Marine Dr, Paarden Eiland | T: +27 21 511 6116
info@lightsbylinea.com | www.lightsbylinea.com