
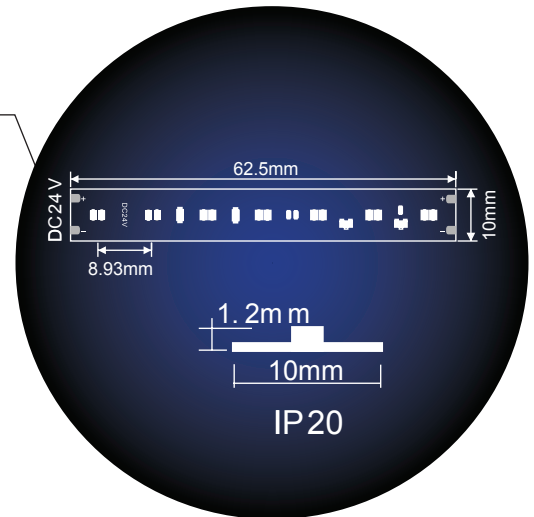


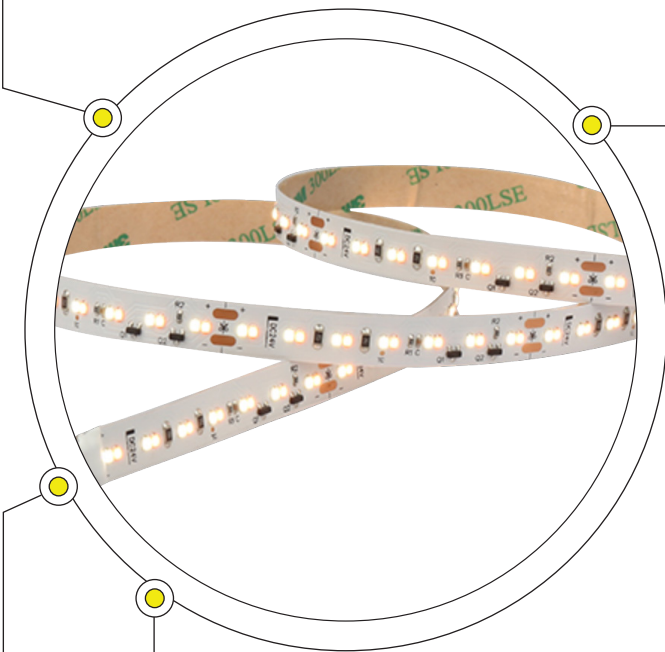

+ IP
20

LOA

✓
5 YRS

ldt

FLX



PHYSICAL DATA

FEATURES

- Dim to Warm White LED strip
- Dim by TRIAC, 0/1 - 10V, DALI and PWM constant voltage dimmable driver
- High quality PCB, high thermal 3M adhesive
- 1-Bin delivery

OPTIONS & ACCESSORIES

- Other customised CCT is available

MOUNTING

Surface


APPLICATION AREAS

Commercial, Offices, Industrial, Retail, Hotels, Schools, Restaurants, Museums, Galleries, Residential, Architectural, Supermarkets

TECHNICAL DATA

LBLFLEX18DTW224

LAMP	SMD2216
OPERATING VOLTAGE-VAC	24V
TOTAL POWER (W)	18W (full brightness)
SYSTEM OUTPUT (LM)	1529LM @ 3000K
EFFICACY (LM/W)	85
CCT (K)	1800-3000K
CRI (Ra)	>80
BEAM ANGLE	0.75MA
RATED LIFE (HRS)	120°
CURRENT (MA)	50 000
OPERATING TEMPERATURE °C	0°C TO 50°C
TC CASE MAX TEMP (°C)	60°C
MAC ADAM STEP	3 STEP
DIMENSIONS	5000mm x 10mm x 1.2mm
WEIGHT	0,25
CUT	62,5mm/cut

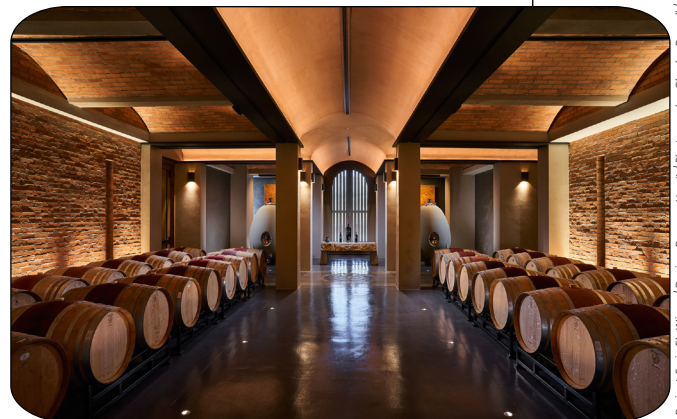


Project Ernie Els Wines / Design: Rummour has it / Photography: Charles Russell / Lighting Design: Linea Kühn

cd/klm

C0 - C180

C90 - C270



E&OE MAY OCCUR



Lights By Linea
Since (1990)

Cape Town | 48 Marine Dr, Paarden Eiland | T: +27 21 511 6116
info@lightsbylinea.com | www.lightsbylinea.com