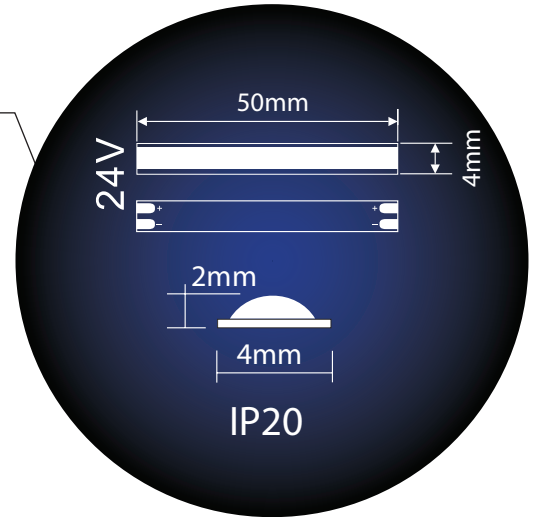
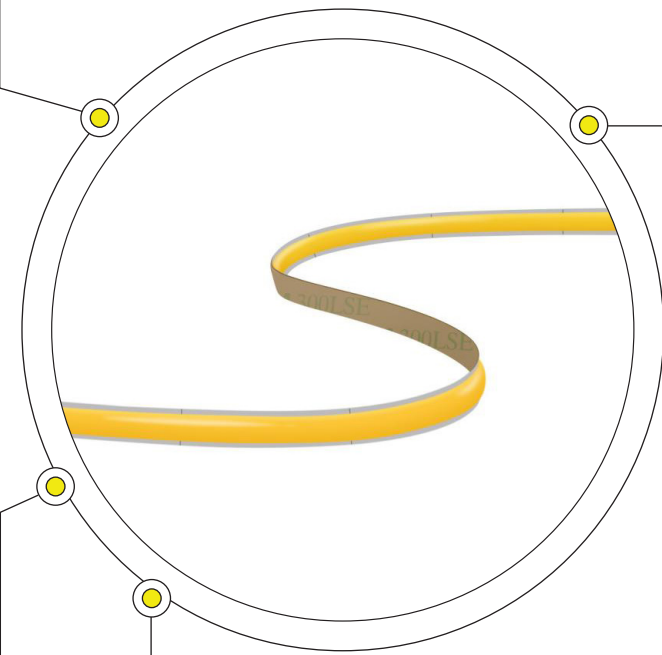


+ IP
20

LOA

✓
5 YRS

Idt

FLX



PHYSICAL DATA

FEATURES

- Light beam angle up to 180°
- Self encapsulated design
- Chips on narrow strip
- High quality PCB, high thermal 3M adhesive
- No dots shown through diffusers
- The density of chips is 480 chips per meter

- Various mono-colours available as well as RGB, RGBW and Tunable white COB strips for selection
- The available widths of PCB for selection: 4mm, 8mm, and 10mm

MOUNTING: Surface**APPLICATION AREAS**

Commercial, Offices, Industrial, Retail, Hotels, Schools, Restaurants, Museums, Galleries, Residential, Architectural, Supermarkets

OPTIONS & ACCESSORIES

- CCT (K) available for selection: 2700K, 3000K, 4000K and 6500K


TECHNICAL DATA

LBLFLEX5WW24V

LAMP	LED COB
OPERATING VOLTAGE-VAC	24V
TOTAL POWER (W)	5W
SYSTEM OUTPUT (LM)	512LM @ 3000K
EFFICACY (LM/W)	93
CCT (K)	3000K
CRI (Ra)	90
BEAM ANGLE	180°
CURRENT (A/m)	0.21A
OPERATING TEMPERATURE °C	-20°C TO 50°C
MAC ADAM STEP	3 STEP
DIMENSIONS	L:5000 x W:4 x H:2mm
CUT	50mm/cut



- cd/klm
- C0 - C180
 - C90 - C270



E&OE MAY OCCUR



Lights By Linea
Since (1990)

Cape Town | 48 Marine Dr, Paarden Eiland | T: +27 21 511 6116
info@lightsbylinea.com | www.lightsbylinea.com