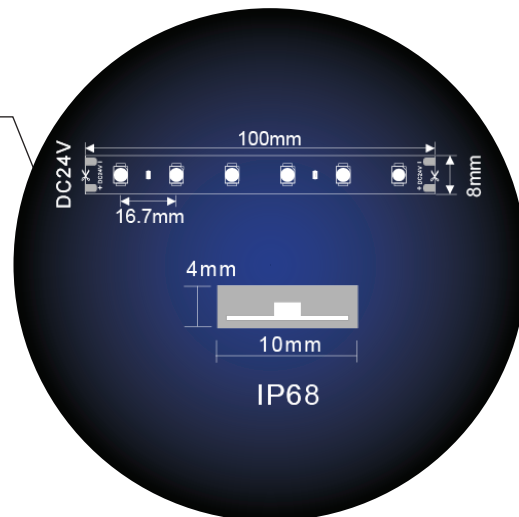
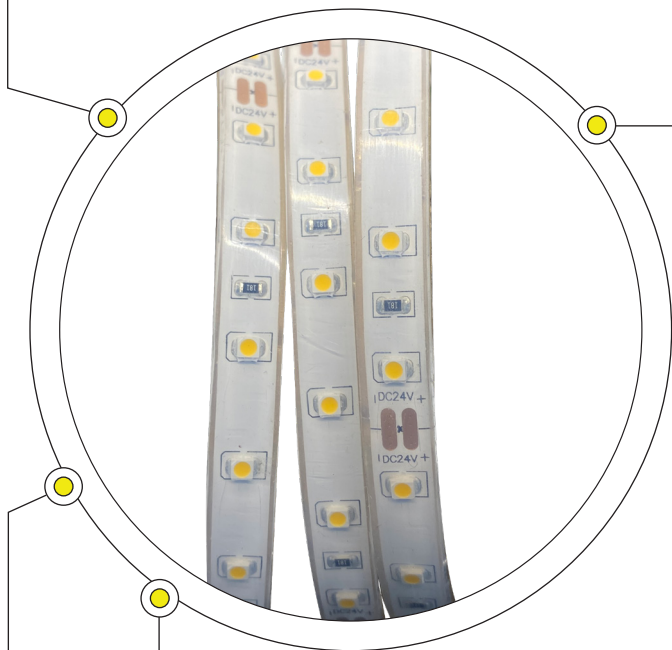


+ IP
68

LOA

✓
3 YRS

ldt

FLX



PHYSICAL DATA

FEATURES

- Self-encapsulated design
- High-quality PCB, high-thermal 3M adhesive
- Double layer FPC (2oz) for good heat dissipation
- 1-BIN delivery / 5m Reel
- Dimmable

OPTIONS & ACCESSORIES

- Offers optional 1800 -10 000K
- Offers white lights and R/G/B/Y colourful lights

MOUNTING

Surface

APPLICATION AREAS


Commercial, Offices, Industrial, Retail, Hotels, Schools, Restaurants, Museums, Galleries, Residential, Architectural, Supermarkets

TECHNICAL DATA

LBLEXW4.8WW24

LBLEXW4.8CW24


LAMP	SMD3528	SMD3528
OPERATING VOLTAGE-VAC	24V	24V
TOTAL POWER (W)	4.8W	4.8W
SYSTEM OUTPUT (LM)	454LM	504LM
EFFICACY (LM/W)	95	105
CCT (K)	3000K	4000K
CRI (Ra)	>80	>80
BEAM ANGLE	120°	120°
RATED LIFE (HRS)	30 000	30 000
CURRENT (MA)	0.2MA	0.2MA
OPERATING TEMPERATURE °C	-20°C TO 50°C	-20°C TO 50°C
TC CASE MAX TEMP (°C)	60°C	60°C
MAC ADAM STEP	3 STEP	3 STEP
DIMENSIONS	5000mm x 10mm x 4mm	5000mm x 10mm x 4mm
WEIGHT	0,45	0,45
CUT	100mm/cut	100mm/cut

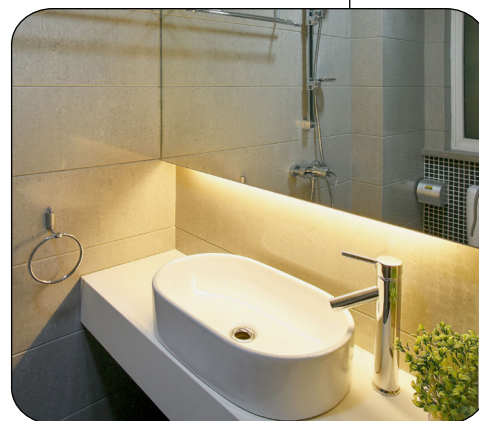

cd/klm

C0 - C180

C90 - C270



E&OE MAY OCCUR



Lights By Linea
Since (1990)

Cape Town | 48 Marine Dr, Paarden Eiland | T: +27 21 511 6116
info@lightsbylinea.com | www.lightsbylinea.com