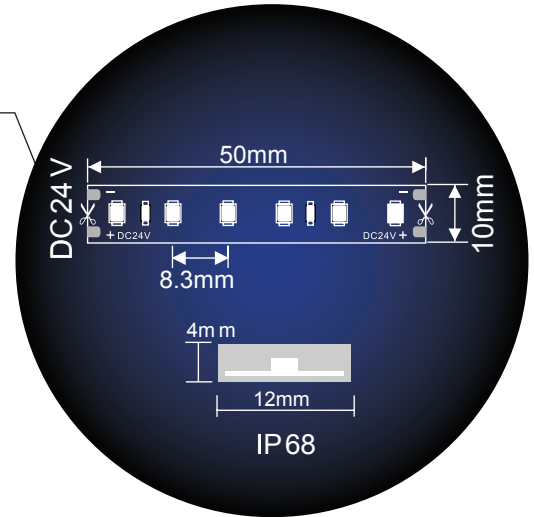


+ IP
68

LOA

✓
3 YRS

Idt

FLX



PHYSICAL DATA

FEATURES

- Self-encapsulated design
- High-quality PCB, high-thermal 3M adhesive
- Double layer FPC (2oz) for good heat dissipation
- 1-BIN delivery / 5m Reel
- Dimmable

MOUNTING

Surface

APPLICATION AREAS

Commercial, Offices, Industrial, Retail, Hotels, Schools, Restaurants, Museums, Galleries, Residential, Architectural, Supermarkets, Landscape

OPTIONS & ACCESSORIES

- Offers six optional 2100-6000K
- Offers four optional R/G/B/Y colourful lights optional

TECHNICAL DATA

LBLFLXW14.4WW24

LBLFLXW14.4CW24


LAMP	SMD2835	SMD2835
OPERATING VOLTAGE-VAC	24V	24V
TOTAL POWER (W)	14.4W	14.4W
SYSTEM OUTPUT (LM)	2135LM	2947LM
EFFICACY (LM/W)	90	90
CCT (K)	3000K	4000K
CRI (Ra)	>80	>80
BEAM ANGLE	120°	120°
RATED LIFE (HRS)	30 000	30 000
CURRENT (MA)	1.2MA	1.2MA
OPERATING TEMPERATURE °C	-20°C TO 50°C	-20°C TO 50°C
TC CASE MAX TEMP (°C)	60°C	60°C
MAC ADAM STEP	3 STEP	3 STEP
DIMENSIONS	5000mm x 12mm x 4mm	5000mm x 12mm x 4mm
WEIGHT	0,45	0,45
CUT	50mm/cut	50mm/cut



cd/klm

C0 - C180

C90 - C270



E&OE MAY OCCUR



Lights By Linea
Since (1990)

Cape Town | 48 Marine Dr, Paarden Eiland | T: +27 21 511 6116
info@lightsbylinea.com | www.lightsbylinea.com