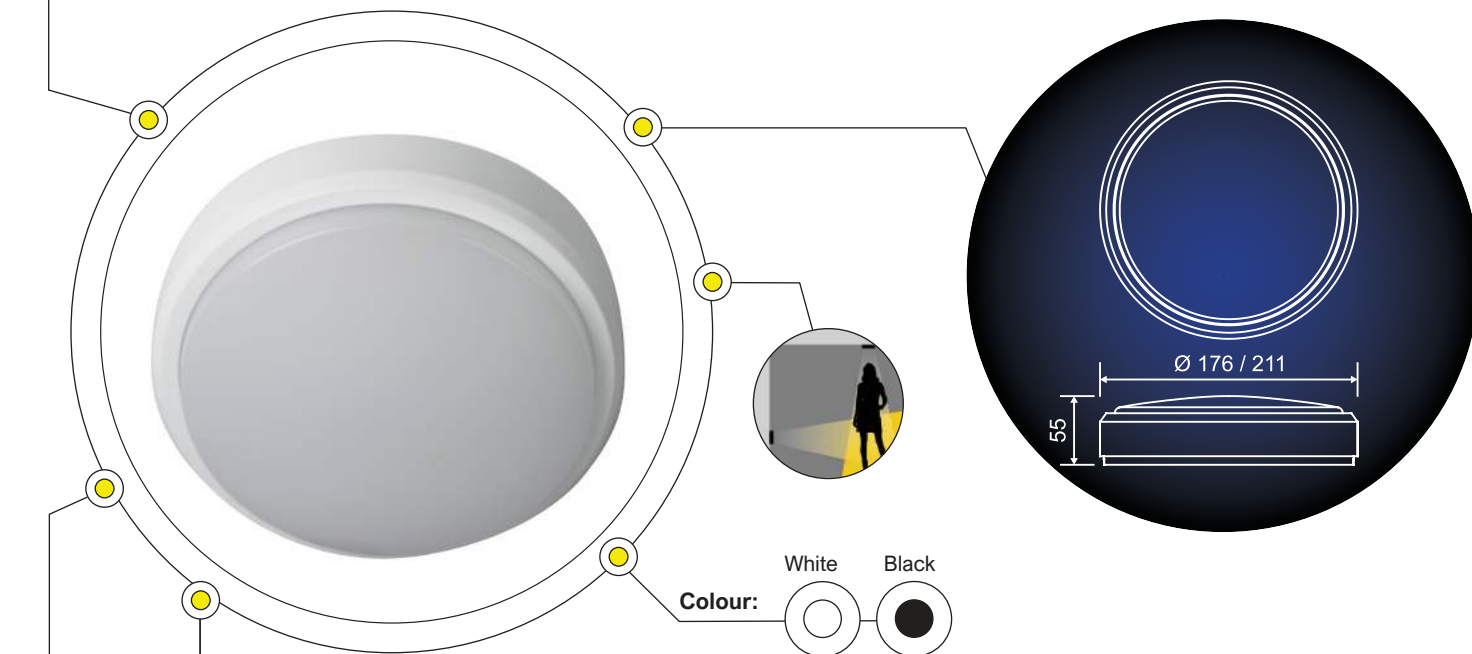


+IP
65

LOA

✓
3 YRS

Idt

PHYSICAL DATA

FEATURES

- Material: UV stabilized Polycarbonate housing and diffuser with aluminium LED tray and rubber-sealed cable entry
- No infra-red or ultra-violet in the light beam preventing fade and foliage damage
- Will not corrode and is durable with high impact rating
- Complete with white and black trims
- Non-dimmable
- Suitable for switching by PIR, Microwave or Photocell

OPTIONS & ACCESSORIES

- Round or Oval 8W, 12W and 18W options available for selection

MOUNTING

Surface

APPLICATION AREAS

Indoor, Outdoor, Commercial, Residential, Retail, Hospitality

TECHNICAL DATA


LLEDBH068

LLEDBH0612

LAMP	LED	LED
TOTAL POWER (W)	8.8W	12W
SYSTEM OUTPUT (LM)	640LM	910 / 950LM
EFFICACY (LM/W)	73	78 / 79
CCT (K)	3000K	3000K / 4000K
CRI (RA)	>80	>80
BEAM ANGLE	120°	120°
OPERATING VOLTAGE-VAC	220-240V	220-240V
OPERATING TEMP °C	-20°C TO 40°C	-20°C TO 40°C
RATED LIFE (HRS)	30 000HRS	30 000HRS
POWER FACTOR	0.5	0.5
LUMEN MAINTENANCE	L70B50	L70B50
ILLUM @ 1M (LUX)	180LX	250 / 280LX
IMPACT RATING (IK)	IK08	IK08
MAC ADAM STEP	<6 SDCM	<6 SDCM
WEIGHT (KG)	0.31KG	0.41KG
DIMENSIONS	D:φ176 x H:55mm	D:φ211 x H:55mm

CD / KLM

- C0 - C180
● C90 - C270



E&OE MAY OCCUR



Lights By Linea
 Since (1990)

Cape Town | 48 Marine Dr, Paarden Eiland | T: +27 21 511 6116
 info@lightsbylinea.com | www.lightsbylinea.com