




+ IP
20



LOA

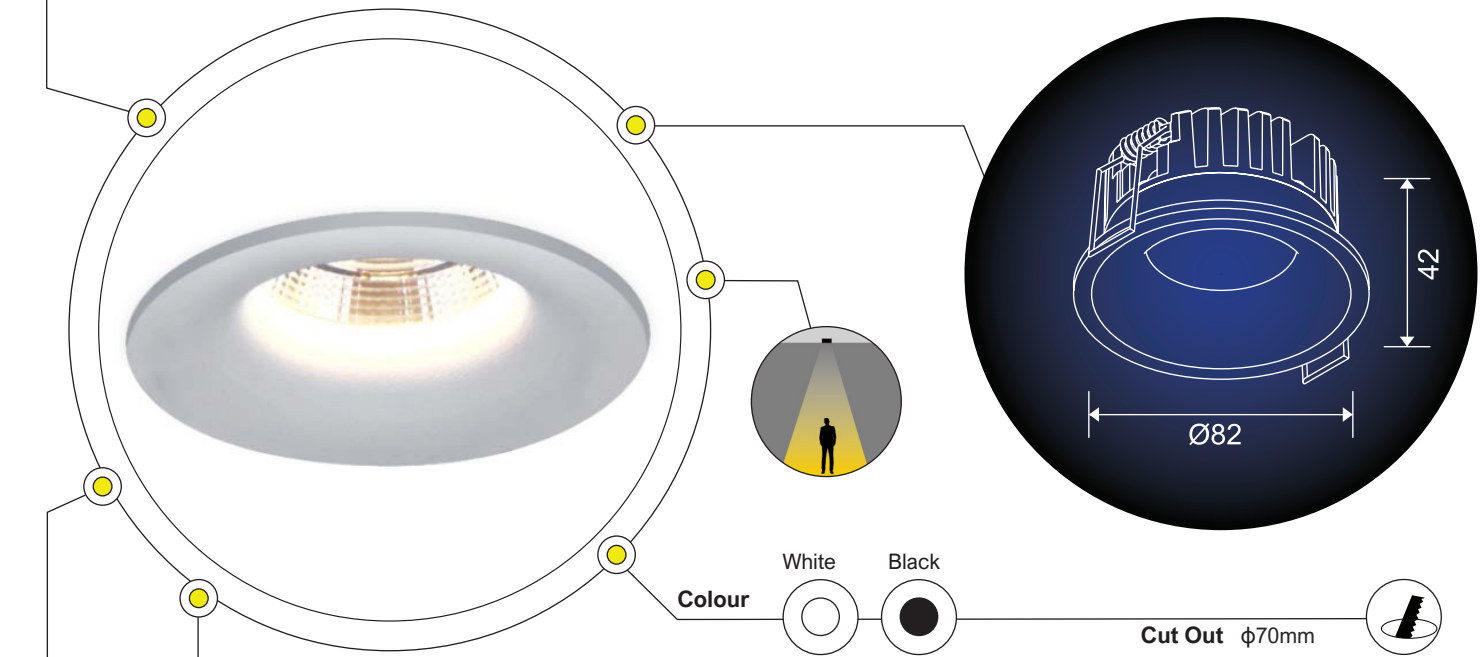

ldt

PHYSICAL DATA

FEATURES

- Material: Aluminium
- The NIC is the most extensive product family in the FLUA collection, answering almost all your lighting requirements.
- The range includes round and square, recessed, round surface lights, adjustable and fixed options as well as square and rectangular plates allowing one to mount the NIC in a series of either one, two or three downlights

OPTIONS & ACCESSORIES

- DALI, TRIAC DIM, Dim 01/-10V dimming available

- LF156012EAW3K with longer heatsink available: D:Ø82 x H:68mm
- Square version available

MOUNTING

Recessed


APPLICATION AREAS

Indoor, Commercial, Residential, Hospitality, Retail


TECHNICAL DATA

LF156012BEA

LAMP	LED
TOTAL POWER (W)	9.35W
SYSTEM OUTPUT (LM)	698LM
CCT (K)	2700 / 3000 / 3500 / 4000K
CRI (Ra)	90
BEAM ANGLE	31° / 23° / 47°
OPERATING VOLTAGE-VAC	220-240V
SOURCE POWER (W)	11.12W
SOURCE OUTPUT (LM)	1009LM
CURRENT (mA)	500mA
FLICKER FACTOR	102.74HZ / 0.55%
WEIGHT	0.23KG
DIMENSIONS	D:Ø82 x H:42mm
CUT OUT	D:Ø70mm

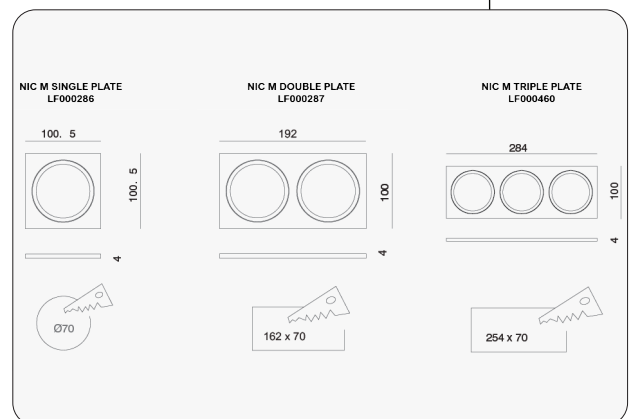

- CD / KLM
- C0 - C180
 - C90 - C270



E&OE MAY OCCUR



Lights By Linea
Since (1990)

Cape Town | 48 Marine Dr, Paarden Eiland | T: +27 21 511 6116
info@lightsbylinea.com | www.lightsbylinea.com